



350 Pipe Level Set (5 Pcs pipe level set)

**Specification**

Nominal Sizes  
 • 1/2"  
 • 3/4"  
 • 1"  
 • 1 1/4" – 1 1/2"  
 • 2"

**Features**

- 2 Easy-to-read vials:
- 1 Vertical.
- 1 Horizontal.
- Spring loaded for easy click-on attachment.
- Available in clip strip.



340 POSTRITE® (Folding Post Level)

**Specification**

Dimensions:  
 7.7" (w) x 7.7" (d) x 9.45" (h)  
 19.5cm (w) x 19.5cm (d) x 24cm (h)

**Features:**

- Folds closed, opens flat.
- Click-lock every 15°.
- Adjustable elastic strap for non-magnetic surfaces.
- 4 powerful magnets for metal surfaces.
- For all posts, pipes and signs.



985D DIGIMAN™ (Professional Magnetic Digital Box Level)

**Features**

- Plumb Site® Dual-View™ vial, solid acrylic vials, Ergo Grip™ handles, shockproof end caps.
- 45° tilted LCD display with backlight.
- 180° readout – display remains straight when the level is upside-down.
- Digital accuracy: 0.1° at level and plumb, 0.2° other angles.
- HOLD function, MODE function: Degree/percentage/pitch.
- Recalibration function and "False Zero" & Memory recall – 9 measurements.
- Buzzer at 0°, 45° and 90°.
- Rainproof & dust resistant 9V battery + battery indicator.
- Large silicon buttons which are easy to use while wearing gloves.
- Two finely milled surfaces with rare earth magnets.

**Specification**

Lengths:  
 • 10" (25cm)  
 • 24" (60cm)  
 • 48" (120cm)



992 Digital T-Level (Precise angle Measurer and Level)

**Specification**

Lengths:  
 • 12" (30cm)

**Features**

- Adjustable blade locks at any angle & Designed for use with power hand-saw.
- 180° readout – display remains straight when the level is upside-down.
- Reference angle (false zero) for transferring angle measurements.
- Easy recalibration & Accuracy: 0.1°.
- Anodized aluminum profile.



215 Stainless Steel Layout and Marking Chalk Line

**Specification**

• Length: 30m

**Features**

- Traditional plumb-bob design.
- Tough stainless steel casing with rubber molding.
- Detachable line level clicks into chalk line.
- Extra fast rewind (6:1) with string lock mechanism.
- All-in-one end hook: holds on nails & ledges, tacks into drywall.
- Hook docking point.
- Clean chalk refill – won't spill.
- 100" (30m) line.
- 4 oz (113g) capacity.




306 Aluminum Ruler with Conversion Tables (Aluminum Ruler)

**Specification**

Lengths:  
 • 12" (30cm)  
 • 16" (40cm)  
 • 20" (50cm)  
 • 24" (60cm)  
 • 32" (80cm)  
 • 40" (100cm)  
 • 48" (120cm)

**Features**

- Anodized aluminum ruler.
- Durable printing.
- Wear-resistant UV cured screen printing.
- Printed scale accurate to 0.7mm/m.
- 1.2" (3cm) width.

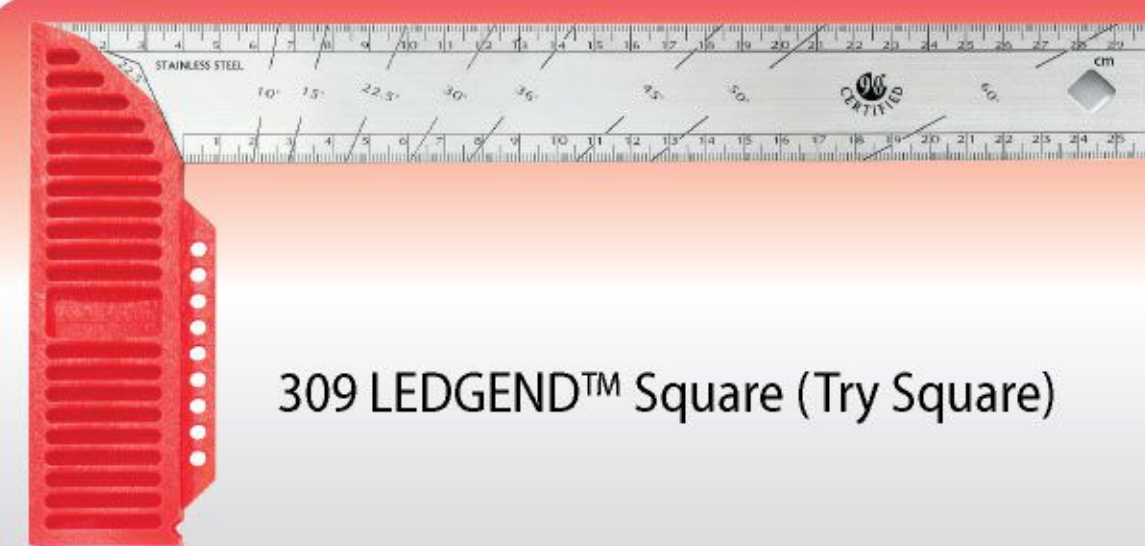

309 LEDGEND™ Square (Try Square)

**Specification**

Lengths:  
 • 8" (20cm)  
 • 10" (25cm)  
 • 12" (30cm)  
 • 16" (40cm)

**Features**

- Unique support ledge & High-impact polymer handle.
- Permanently etched stainless steel blade.
- 22.5°, 45°, 67.5° and 90° angles for beveling and framing.
- Inch/cm gradations or cm/cm.
- Certified 90°.
- Marking point.



313 Measure Mate (Ruler Measure Mate)

**Specification**

Lengths:  
 • 12" (30cm)  
 • 24" (60cm)  
 • 48" (120cm)

**Features**

- Sturdy triangular profile + 2 easy-to-read vials.
- Sliding markers – set & transfer measurements.
- Sliding knife guide – safe & accurate, Zero & center point scales.
- Zero & center point scales.
- Nail gripper and drill bit diameter gauge: safe and easy nailing.
- Electrical & plumbing scale markings.



314-03 Ruler for Marking With Level

**Specification**

Lengths:  
 • 24" (60cm)  
 • 32" (80cm)  
 • 40" (100cm)  
 • 48" (120cm)  
 Width: 2.8" (7cm)

**Features**

- Patented Set & Match Ruler.
- 2 easy-to-read slide & lock vials – horizontal and vertical.
- Slide & lock vial mechanism.
- Non-slip foam backing prevents scratching.




301 T-Bevel (T-Bevel with Stainless Steel Blade)

**Specification**

11.2" x 5.2" x 3.6"

**Features**

- Leveling vial.
- Built-in 5mm (3/16") trim gauge on side and bottom.
- Stainless steel blade and bolt.
- Tough rubber handle inserts.
- Inch/cm gradients.
- Angle markings on handle.

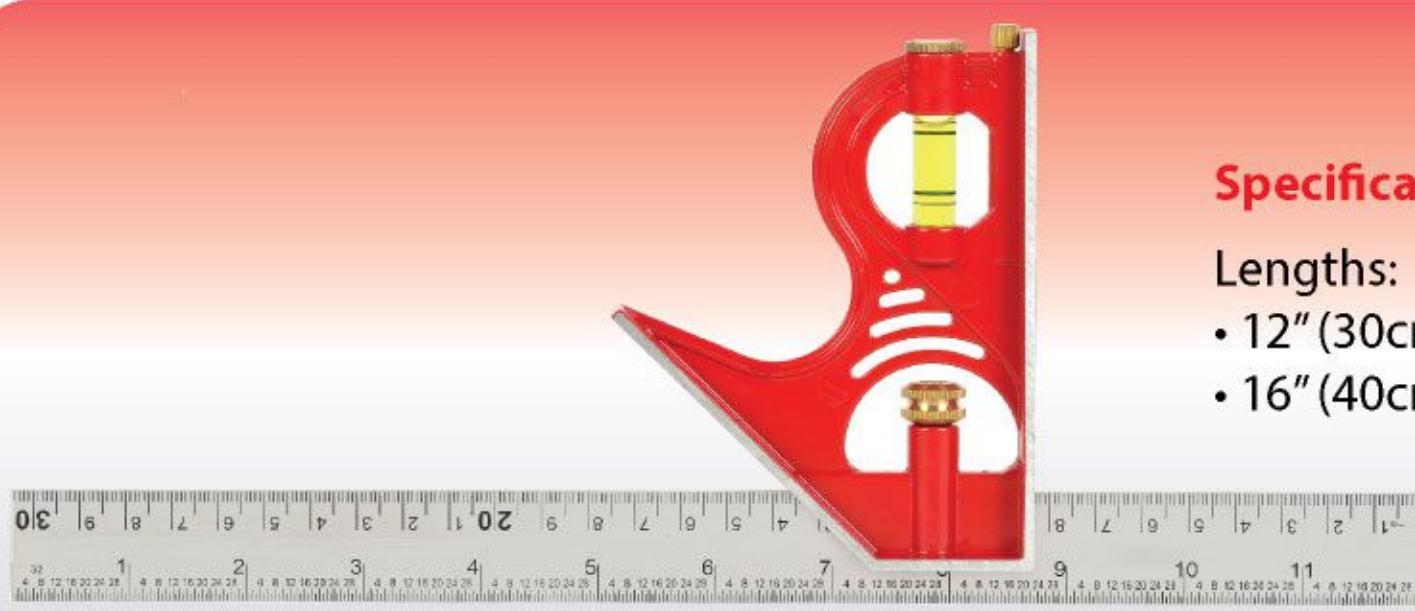

352 Combination Square

**Specification**

Lengths:  
 • 12" (30cm)  
 • 16" (40cm)

**Features**

- Stainless steel blade with permanently etched ruler markings (in. and cm).
- 5 milled sides for superior accuracy.
- Heavy-duty cast zinc body.
- Belt holster included.
- Easy to read vial.



- **KAPRO** is a leading manufacturer and developer of innovative hand tools for the professional and DIY markets.
- **KAPRO** is the only level manufacturer in the world to carry the prestigious VPA mark of quality. All our manufacturing facilities are certified compliant with **ISO standards 9001, 14001, and SA8000**. All Kapro laser and electronic products carry **FDA and CE certification**, also comply with **RoHS, WEEE and REACH regulations**.
- We make the industry's finest quality spirit levels, laser levels, and layout, marking and measuring tools. The company has built a reputation as the industry's foremost innovator, and is renowned for its quality products, outstanding service, added value, and cutting-edge designs.
- **KAPRO** is dedicated to excellence in every aspect of development, production, distribution, and sales and marketing.



**862 Mini Cross Line Laser**  
(Survey Level with Laser + Bracket)

**Specification**

- Laser range: Indoor – 65ft (20m).
- Self-leveling range: ±5°.
- Accuracy: 0.0003"/m (0.3mm/m).
- 2 AAA batteries (not included).
- Laser class II.

**Features:**

- Vertical, horizontal and cross beams.
- Laser range: indoor 20m (65').
- Manual mode for angular layout/marketing.
- Visual and audible "out of level" warning.
- 1/4" tripod thread.
- Hanging options:
  - 2 rare earth magnets & Hanging hole.
  - V-groove & "Velcro" strips.



**872 Prolaser® Plus Red**  
(Laser level Red, The Free Standing Cross-Beam Laser)

**Specification**

- Laser range:
  - Indoor – 100ft (30m).
  - Outdoor with detector 165ft (50m).
- Self-leveling range: ±5°.
- Accuracy: 0.0002"/m (0.2mm/m).
- 3 AA batteries (not included).
- Laser class II.
- Conforms to CE, RoHS, and FDA safety regulations.

**Features**

- Intersecting horizontal and vertical lines at 90°.
- "Tilt" mode for angular layout/marketing.
- Strong folding legs for angle mounting and height adjustment.
- Self-leveling mechanism.
- Visual and audible "out of level" warning.
- 1/4" tripod adaptor.
- Shock resistant rubber casing.
- Legs fold closed against unit to protect the laser.
- Compact size – fits in your toolbox



**873 Prolaser® Vector** (Laser level)

**Specification**

- Laser range:
  - Indoor: 30m (100').
  - Outdoor: 60m (200') with detector.
- Self-leveling range: ±5°.
- Accuracy: 0.0002"/m (0.2mm/m).
- 3 AA batteries (not included).
- Laser class II.
- Conforms to CE, RoHS, and FDA safety regulations.

**Features**

- 1 Horizontal and 2 vertical lines at 90°, intersections forward and on the ceiling.
- Manual mode for angular layout/marketing.
- Strong folding legs for angle mounting in manual mode and height adjustment.
- Self-leveling mechanism.
- Visual and audible "out of level" warning.
- 1/4" tripod thread.
- Shock resistant rubber casing.
- Compact – fits in your toolbox



**872G Prolaser® Green**  
(Laser level Green, The Free Standing Cross-Beam Laser)

**Specification**

- Laser range:
  - Indoor – 100ft (30m).
  - Outdoor with detector 165ft (50m).
- Self-leveling range: ±5°.
- Accuracy: 0.0002"/m (0.2mm/m).
- 3 AA batteries (not included).
- Laser class II.
- Conforms to CE, RoHS, and FDA safety regulations.

**Features**

- Intersecting horizontal and vertical lines at 90°.
- "Tilt" mode for angular layout/marketing.
- Strong folding legs for angle mounting and height adjustment.
- Self-leveling mechanism.
- Visual and audible "out of level" warning.
- 1/4" tripod adaptor.
- Shock resistant rubber casing.
- Legs fold closed against unit to protect the laser.
- Compact size – fits in your toolbox



**875 Prolaser® Layout Set With Soft Bag**  
(Survey Level with Laser + Lithium Battery)

**Specification**

- Accuracy: 0.2 mm/m (0.0002"/m).
- Indoor range <20m (65').
- Outdoor range with laser detector (sold separately) <40m (130').
- Laser class II.
- Batteries: 4 AA (not included).
- Conforms to FDA, CE and RoHS safety regulations.

**Features**

- Generates five laser lines (1 horizontal and 4 vertical).
- With intersection on the ceiling and one plumb dot.
- Tripod ready (5/8").
- Visual and audible warning for "out of level" position.
- Manual mode for tilted marking.
- USB connection for charging the lithium battery.
- Includes: Tripod, Laser target, Beamfinder™ glasses, Soft carrying case & Lithium battery (Optional).



**375 Kaprometer K5**  
(Laser Distance Measurer with Beamfinder™)

**Specification**

- Accuracy: 1.5mm
- Range:
  - Indoor range <70m (230')
  - Outdoor range <10m (32')
- Laser class: II
- Conforms to CE and RoHS safety regulations

**Features**

- Indoor measuring distance of up to 70m (230").
- Beamfinder™ flip cover helps you to clearly locate the laser dot on the intended target surface and protect the keypad.
- Measures the shortest distance to target with Dynamic (continuous) measuring.
- Measures area and volume.
- Indirect measuring using Pythagoras (single & double).
- Choice of 3 reference points.
- Advanced memory function.
- Impact-resistant rubber over-mold & Tripod-ready 1/4" thread.



**389 Multiscanner Stud Finder**  
(Electronic Cable, Metal & Stud Sensor)

**Specification**

- Detection Depths:
  - Live AC Wire – 50mm (3")
  - Metal – 75mm (3")
  - Wood – 18mm (¾")
  - Metal Pipes – 38mm (1 1/2")
  - Copper Pipes – 30mm (1 1/5")

**Features**

- Electronic sensors detect live AC wires, metal, studs, wood.
- Detection buzzer.
- Automatic scan.
- Automatic calibration.



**946 Smarty OPTIVISION™ Red**(Magnetic Cast aluminum level 10cm /3.9")

**Specification**

- Dimensions:
  - 3.86" x 2.11" x 1.57"
  - 9.8cm x 5.35cm x 4cm

**Features:**

- OPTIVISION™ Red Horizontal vial.
- Large base with Rare-earth magnets.
- Accuracy: < 0.5mm/m (0.0005"/m).
- Durable cast aluminum body.
- Shockproof rubber.
- Belt holder.



**926 Pipemaster**(CONDUIT PIPES LEVEL 16.6cm/6.5")

**Specification**

- Lengths: 16.6 cm (6.5")

**Features**

- Professional level for electricity infrastructure of performance piping bends.
- Solid acrylic shockproof vials – vertical and horizontal - with a Lifetime warranty.
- 4 epoxy locked vials for measuring slope of 00 -300, 450,900.
- Tough base accurately processed by CNC machined.
- Top surface V-groove for pipes.
- Extra strong Rare-earth magnet.
- Hanging strap.



**905 Condor** (Spirit Level, Red Vial, Heavy, Magnetic with OPTIVISION)

**Specification**

- Lengths:
  - 24" (60cm)
  - 32" (80cm)
  - 40" (100cm)
  - 48" (120cm)
  - 72" (180cm)
  - 80" (200cm)
  - 96" (250cm)

**Features**

- 2 or 3 solid acrylic shockproof vials
- OPTIVISION™ Red horizontal vial creates highly visible red bubble edges, for exact placement between the reading lines and optimal vision in bright & low light
- Tilted, tri-surface horizontal vial: direct line of sight for easy viewing and superior vial protection
- Gradient lines inside the horizontal vial for measuring slopes at 1% and 2% grade
- Plumb Site® Dual-View™ vial with RedEffect™ for a clear plumb view
- Reinforced profile with bridge at horizontal vial for increased strength and a continuous marking edge
- Finely milled surface on lengths up to 120cm (48")
- Ergo Grip™ rubber handle with wall-grip feature
- Oversized shock-absorbing rubber end caps
- Accuracy: < 0.5mm/m (0.0005"/m)
- Available with rare-earth magnets



**227 Toolbox Level 9" (23cm)**

**Specification**

- Lengths:
  - 23cm (9")

**Features**

- 3 easy-to-read vials (horizontal, vertical, 45°).
- Magnetic V-groove for pipe/conduit.
- Tough rubber end caps.



**923 Cast Toolbox Level 25cm (10")**

**Specification**

- Lengths:
  - 25cm (10")

**Features:**

- Plumb Site® Dual-View™ vial.
- 3 solid acrylic vials.
- Epoxy-locked solid acrylic horizontal vial.
- Heavy-duty cast aluminum body.
- V-groove for pipe/conduit.
- Strong rare-earth magnets.
- Accuracy: < 0.5mm/m (0.0005"/m).
- VPA Certified.



**779-40M Spirit™ Quality Box Level** (Spirit Level Magnetic)

**Specification**

- Lengths:
  - 12" (30cm)
  - 16" (40cm)
  - 20" (50cm)
  - 24" (60cm)
  - 32" (80cm)
  - 36" (90cm)
  - 40" (100cm)
  - 48" (120cm)
  - 60" (150cm)
  - 72" (180cm)
  - 80" (200cm)

**Features:**

- 2 or 3 solid acrylic vials.
- Shock absorbing rubber end caps.
- Accuracy: <0.0005 in/in. (0.5mm/m).
- Milled surface on Lengths up to 48" (120cm).
- Wall grip feature.



**770 Exodus Professional Box Level with Ruler and Straight Edge** (Spirit Level with Scale)

**Specification**

- Lengths:
  - 24" (60cm)
  - 32" (80cm)
  - 36" (90cm)
  - 40" (100cm)
  - 48" (120cm)
  - 60" (150cm)
  - 72" (180cm)
  - 80" (200cm)

**Features:**

- 3 solid acrylic shockproof vials: Horizontal with gradient lines up to 2%, Vertical 45°.
- Ruler along the profile.
- Finely milled surface (up to 120cm).
- Shock absorbing rubber end caps.
- Accuracy: 0.5 mm/m (0.0005"/m).
- Wall Grip feature.



**920 SHARK®** (The Ultimate Mason's Level)

**Specification**

- Lengths:
  - 16" (40cm)
  - 20" (50cm)
  - 24" (60cm)
  - 32" (80cm)
  - 40" (100cm)

**Features**

- Plumb Site® Dual-View™ vial.
- 2 solid acrylic vials.
- Milled surface.
- Accuracy: 0.0005 in/in. (0.5mm/m).
- Shock absorbing rubber "anvils".
- Heavy-duty cast aluminum trapezoid body.